



TECHNICAL SHEET
LEADER PF 3 PLUS

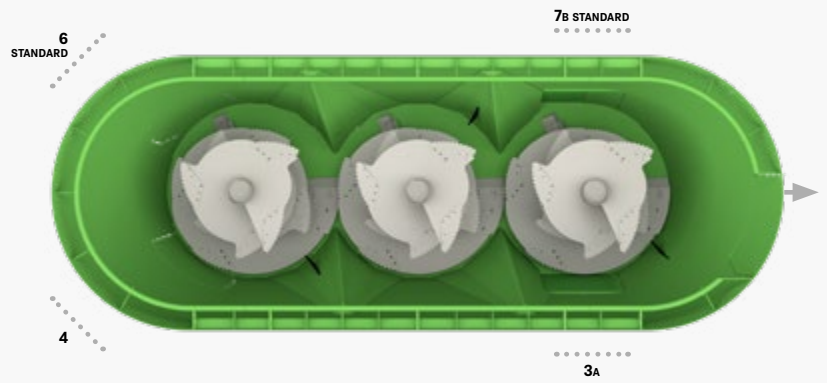

It brings to the attention of all potential customers, all recipients, and to the maximum extent possible, external interlocutors, that Faresin Industries S.p.A. adopts a general Disclaimer regarding the description of the technical and functional characteristics of its machineries, as well as the manner of their use, also with regard to their safety. The Disclaimer must be understood as having a general scope, and therefore Faresin Industries s.p.a. invites to know it, also by accessing the website: www.faresindustries.com

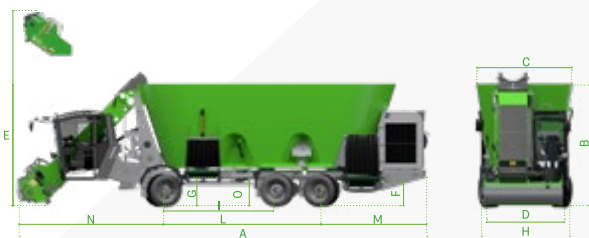

FARESIN.COM



ENGINE STAGE V		3.30	3.36	3.40
Builder		FPT N67	FPT N67	FPT N67
Power	kW/hp	212/290	212/290	212/290
Aftertreatment system		DOC + SCROF	DOC + SCROF	DOC + SCROF
Capacity	m ³	30	36	40

DIMENSIONS ECOMIX		3.30	3.36	3.40
[A] total length	mm	12000	11800	12000
[B] height	mm	3350	3550	3750
[C] width	mm	2500	2800	2800
[D] milling cutter width	mm	2200	2200	2200
[E] milling height	mm	5600	6560	6560
[F] front unloading height	mm	950	950	950
[G] rear unloading height	mm	1150	1150	1150
[H] outside wheels	mm	2500	2500	2500
[I] axle clearance 1-2	mm	3350	3350	3350
[L] axle clearance 2-3	mm	1265	1265	1265
[M] rear projection	mm	3050	3050	3050
[N] front projection	mm	4130	4130	4130
[O] frame height	mm	610	610	610

WEIGHT		3.30	3.36	3.40
Unladen weight	kg	21000	21800	22000

TYRES		3.30	3.36	3.40
Standard		385/55 R22,5	385/55 R22,5	385/55 R22,5

CONFIGURATION		ECOTRONIC
Adjustable seat with air suspension		●
Joystick		multi-function electro-proportional
Cabin		PF Cab
Ventilation system		three speeds and temperature setting
Air conditioning		○
Steering column with three adjustment points		●
Front and rear road traffic lights		●
7 work LED lights		●
Fuel tank	l	300
Electronic weighing system		4 sensor
Maximum speed	km/h	40
Front axle 1		Adjustable air suspension drive and steering
Front axle 2		Adjustable and steerable air suspension
Rear axle		Adjustable air suspension drive and steering
All-wheel steering		●
Height-adjustable air suspension and automatic leveling		●
ABS system		automatic
ASR system		selected
Number of augers		3
Speed range of the auger	rpm	5, 10, 15, 20, 25, 30, 40, 50
NIR ready		○
Number of knives		from 9 to 10
External diameter of milling cutter roller	mm	650
Two unloading doors with belt		●
Hydraulic counter-knives		3
Shredder on milling cutter		○
Automatic greasing system		○

● Standard ○ Optional - Not available